
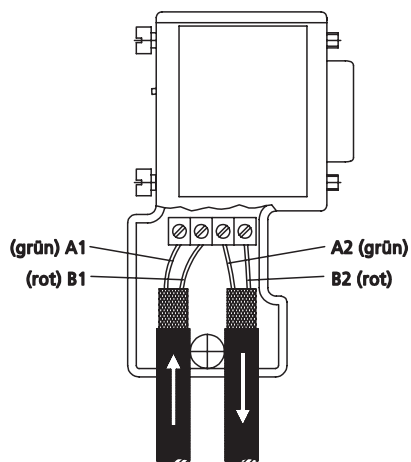


0976 PMC 501

Profibus-DP field attachable, right angle male 9-pole Sub-D connector, screw terminal connection, fully shielded, switchable terminating resistor.

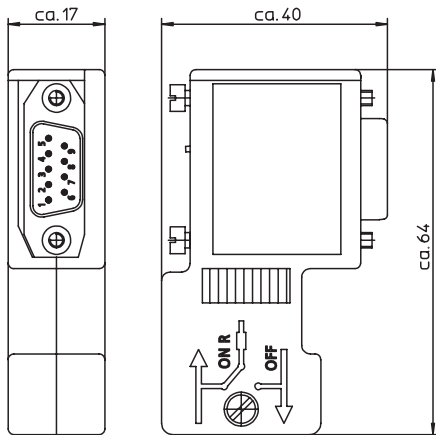

Technical Data

Temperature range -0°C (32°F) / +60°C (140°F)

Materials

Housing ABS, pre-coppered and nickel-plated
Contacts CuZn, pre-nickeled and gold plated

Mechanical data

Protection IP 40
 (Only in locked position)
Mode of connection Screw terminals
Connectable conductor max. 1.0 mm²
Cable exit Verticle

Electrical data

Terminating resistor Selectable
Current consumption max. 12.5 mA
Nominal voltage 4.75-5.25 V DC
Transmission rate max. 12 MBit/s

Interfaces

Profibus device SUBD socket, 9 poles
Profibus bus cable 4 pole terminal block

Part numbers

0976 PMC 501

